





METAL HALIDE LAMP

HSI-TSX 250W/4K BRITELUX



DIMENSIONS (mm)

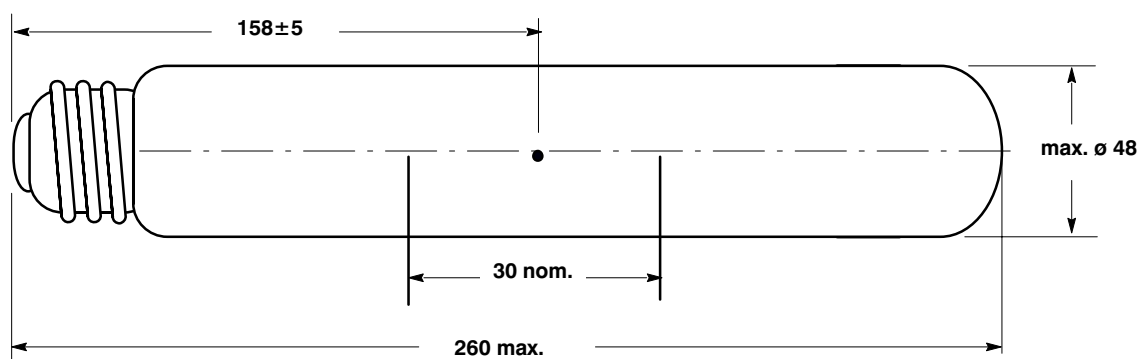

Cap : E40/45 (IEC 61-1)

Bulb : hard glass

ELECTRICAL DATA:		NOMINAL VALUE	MIN.	MAX.
Lamp wattage	(W) :	265		
Lamp voltage	(V) :	100	85	115
Lamp current	(A) :	2.9		
Lamp warm-up current	(A) :		2.9	5.2
Frequency	(Hz) :	50		

OPERATING CONDITIONS:

Burning position	:	any		
Fixture type	:	closed		
Ballast type	:	SHP-250W/220V,230V,240V,250V		
Voltage current ratio	(Ω) :	60		
Calibration current	(A) :	3.0		
Supply voltage	(%) :		92	106
Ignitor pulse	(kVp) :		2.8	
Compensation capacitor	(μF) :	40		
Cap rim temperature	(° C) :			250
Bulb temperature	(° C) :			400

LAMP LIFE :


Rated Average Life	:	12 000
Economical Life	:	9 000

ATTENTION : Lamps comply with the safety requirements of IEC publication 662. Ballasts, ignitors and luminaires must comply with IEC 923, 927 and 598-1, respectively. Inspection is in accordance with IEC 410. Due to high operating pressure inside the lamp, the possibility exists that in extreme circumstances the lamp might shatter. Lamps should not be operated with a broken or absent outer envelope.

Issued by : TIENEN
Date : 08.01.1997
Revision date : 10.01.2000

DATA SHEET

Specification No. : 43 11 250/B
Supersedes : 43 11 250/A 18.03.1998
Page 1 of 2

**PHOTOMETRIC DATA (1), (2) :** **HORIZONTAL BURNING** **VERTICAL BURNING**

Initial luminous flux	(lm) :	21 000	21 000
Luminous efficacy	(lm/W) :	79	79
Mean Luminous Flux (3)	(lm) :	16 000	14 000
Correlated colour temperature	(K) :	4500	4500
Colour rendering index	(class) :	2B	2B

- (1) Measurements are done at nominal supply and after 100 h of ageing.
(2) Photometric data is valid for situations where the arc tube tips does not face downwards
(3) Mean Luminous flux is defined as the average luminous flux over the economical life

ATTENTION : Lamps comply with the safety requirements of IEC publication 662. Ballasts, ignitors and luminaires must comply with IEC 923, 927 and 598-1, respectively. Inspection is in accordance with IEC 410. Due to high operating pressure inside the lamp, the possibility exists that in extreme circumstances the lamp might shatter. Lamps should not be operated with a broken or absent outer envelope.

Issued by : TIENEN
Date : 08.01.1997
Revision date : 10.01.2000

DATA SHEET

Specification No. : 43 11 250/B
Supersedes : 43 11 250/A 18.03.1998
Page 2 of 2